


# uniflex Party and Exhibition Hall

## Type: 15,3/400 · Model: 243

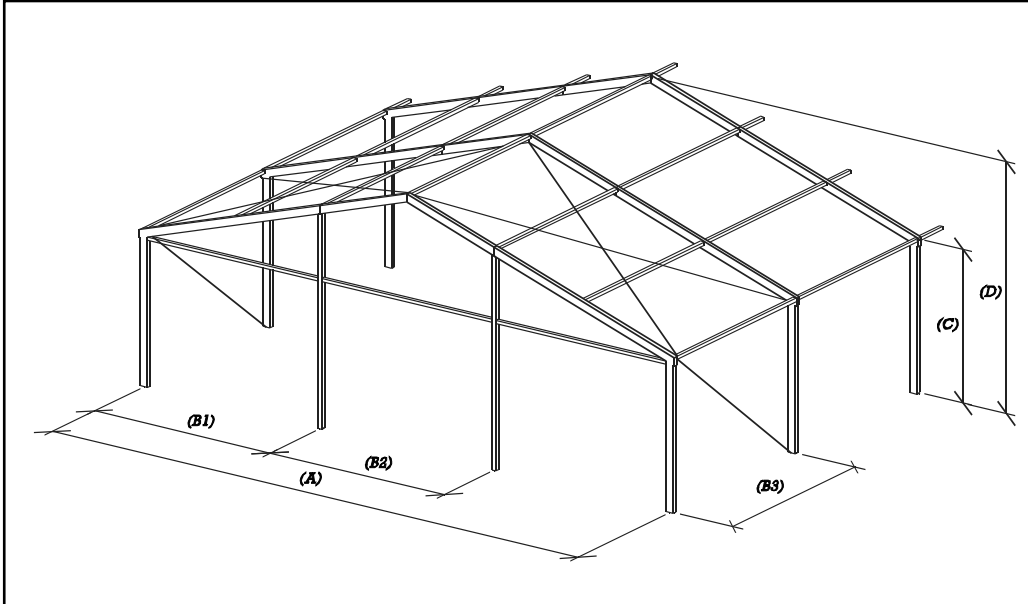

### Measures/Weights

Width	(A)	15,08	m
Eave height	(C)	3,84	m
Ridge height	(D)	6,28	m
Gable truss	(B1)	5,04	m
Gable truss	(B2)	5,00	m
Distance between trusses	(B3)	5,00	m
Membrane peak			m
Roof slope		18,00	degrees
Longest frame component		8,08	m
Truss profile		200 x 120	mm
Ridge and eave purlin		100 x 80	mm
Intermediate purlin		60 x 60	mm
Frame and PVC-fabrics		5,00	sqm

### Technical description

#### Aluminium Profiles

out of solid, hard pressed  
4-groove aluminium hollow profile

#### Steel parts

hot-dip galvanized according to  
DIN 50976,  
extremely corrosion-resistant

#### Ground anchoring

Ground stakes

### Load requirements/Technical data

Wind load	0,50	kN/sqm
Wind speed	100,00	m/h
Minimum assembly length	10,00	m
Maximum assembly length	unlimited	
	in 5 m	
	increments	

Losberger Intertent GmbH  
Gottlieb-Daimler-Ring 14  
D-74906 Bad Rappenau  
Tel.: +49(0)7066/980-0 · Fax: 980232  
eMail: Losberger@Losberger.com  
www.Losberger.com

**LOSBERGER**