


uniflex Party and Exhibition Hall

Type: 25,4/340 · Model: 355

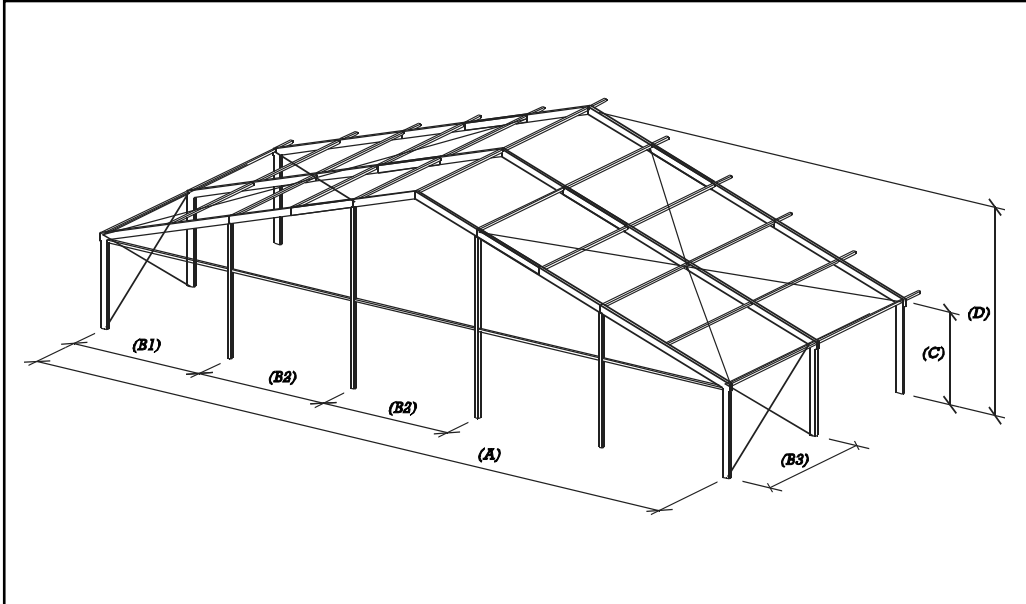

Measures/Weights

| | | | |
|--------------------------|------|-----------|---------|
| Width | (A) | 25,13 | m |
| Eave height | (C) | 3,25 | m |
| Ridge height | (D) | 7,33 | m |
| Gable truss | (B1) | 5,06 | m |
| Gable truss | (B2) | 5,00 | m |
| Distance between trusses | (B3) | 5,00 | m |
| Membrane peak | | | m |
| Roof slope | | 18,00 | degrees |
| Longest frame component | | 7,97 | m |
| Truss profile | | 250 x 120 | mm |
| Ridge and eave purlin | | 100 x 80 | mm |
| Intermediate purlin | | 80 x 80 | mm |
| Frame and PVC-fabrics | | 7,00 | sqm |

Technical description

Aluminium Profiles

out of solid, hard pressed
4-groove aluminium hollow profile

Steel parts

hot-dip galvanized according to
DIN 50976,
extremely corrosion-resistant

Ground anchoring

Ground stakes

Load requirements/Technical data

| | | |
|-------------------------|------------|--------|
| Wind load | 0,50 | kN/sqm |
| Wind speed | 100,00 | m/h |
| Minimum assembly length | 10,00 | m |
| Maximum assembly length | unlimited | |
| | in 5 m | |
| | increments | |

Losberger Intertent GmbH
Gottlieb-Daimler-Ring 14
D-74906 Bad Rappenau
Tel.: +49(0)7066/980-0 · Fax: 980232
eMail: Losberger@Losberger.com
www.Losberger.com

LOSBERGER